




BLANKE DISK-LINE EC

This innovative linear drain is an impressive sealing-water-free system that features unique drainage technology with an integrated drainage lock and a self-adhesive waterproofing membrane. The drainage lock is fitted with a thin silicone flap which serves to permanently protect against odours. The passage to the drainage pipe remains fully sealed and odour-free even during long periods of non-use. The self-adhesive waterproofing membrane is fitted in the factory and can be stuck to the substrate without requiring more glue, and can also be integrated into the self-adhesive BLANKE DISK waterproofing system.



BLANKE DISK-LINE EC

LINEAR DRAIN

Installation height 70 mm excl. tile thickness

PU: 1 pc.


Body length = cm	Grate length = cm	Art. no.	€/PU
70.0	66.5	280-900-070070	492.75
80.0	76.5	280-900-070080	522.29
90.0	86.5	280-900-070090	544.97
100.0	96.5	280-900-070100	581.32
120.0	116.5	280-900-070120	613.11

Important note:

A suitable stainless steel grate (can be tiled using supplied accessories) is included in the scope of delivery.

Expert tip:

Use BLANKE DI-SECURE as an additional layer of protection to protect your waterproofing membrane!

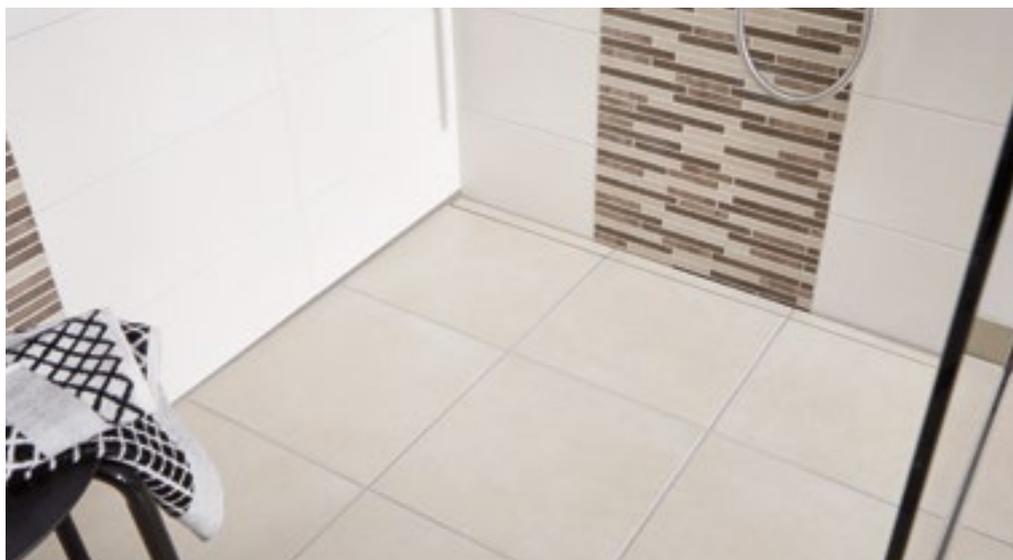

Multifunctional, height-adjustable grate

(stainless steel/tileable) for a stylish and understated look

Unique drainage technology

Linear drain with integrated drain lock

Easy to clean

Thanks to the easily removed drain lock

No unpleasant smells

System without sealing water

Self-adhesive waterproofing membrane

Simple application thanks to self-adhesive waterproofing membrane


100% waterproof

Integrated waterproofing membrane as well as EPS installation and protective block for the highest possible peace of mind

Effective protective core

Protective core as dirt trap and tile stop

BLANKE DISK-LINE EC COMPONENTS

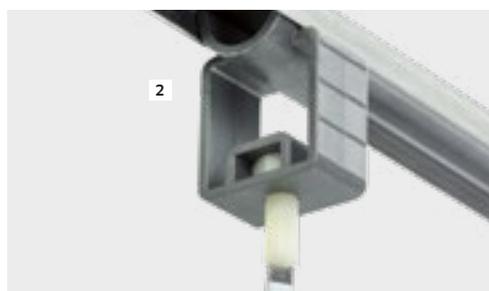

System components (included in price):

- 1 Multifunctional grate
- 2 Height-adjustable grate holder
- 3 Drainage lock with thin silicone flap

TECHNICAL DATA BLANKE DISK-LINE EC

Installation height (h):	70 mm excl. tile thickness	Connection:	DN 50
Body:	Stainless steel	Sealing:	integrated
Grate cover:	Stainless steel	Distance to centre of drain (from above/below) (A1/A2):	35 mm
Sealing:	Polyolefin foam	Distance from back edge of body to front edge of drain connection (A3):	106 mm
Grate holder:	height-adjustable, ABS		
Connection to drain pipe:	Stainless steel connection for push-fit systems		
Colour of ABS parts:	gray		
Sealing ring:	Rubber		
		CAPACITY	
DIMENSIONS		Drain capacity:	with 9 mm tile thickness: 30 l/min
Grate length mm (L1):	665, 765, 865, 965, 1165		with 20 mm tile thickness: 36 l/min
Body in mm (L2):	700, 800, 900, 1000, 1200		
Grate width in mm (B1):	29		
Body in mm (with flange) (B2):	38 (76)		